

# SPA2 C

C-10W | C-30W | C-40W

Reliable laser coding in standard, dusty and washdown environments



## One platform, multiple substrates

CO2 lasers used in higher speed packaged goods applications including boxes, bottles and blister packs. They provide legible markings of the highest quality, which are permanent and sustainable in all production environments. Available in different enclosures in order to mark a wide variety of substrates such as cardboard, glass, ceramics, PET and PVC in the FMCG markets.

[PRODUCT BROCHURE](#)

## SPA2 is much more than a laser system

The SPA2 range of laser coders is the next generation of Macsa's successful SPA, Smart Packaging Application, laser platform. The SPA2 range adds more power options including pulsed CO2 lasers.



MODEL	SPA2 C-10		SPA2 C-30		SPA2 C-40					
IMAGE										
SYSTEM	Power	10 W	30 W	40 W						
	Technology	CO2 Sealed Tube CW RF Technology								
WAVELENGTH	10,6 microns for BIO materials	Std.								
	10,2 microns for FILM materials	-	Opt.							
	9,3 microns for PET bottles	Opt.								
MAINS POWER SUPPLY	110 / 240 V AC		50 / 60 Hz							
	(1 Phase + N) 300 VA	(1 Phase + N) 600 VA	(1 Phase + N) 600 VA							
	Air/Water		Air (SE/DE), Forced Air (WD)		Forced Air					
COOLING	Filtered Blower (200m3/h)	Opt. (DE, WD)		Opt.						
	Filtered Blower (350m3/h)	Opt. (DE, WD)		Opt.						
	Cooling Dryer	Opt. (WD)		Opt.						
	Vortex	Opt. (WD)		Opt.						
	TCU	Opt. (DE, WD)		Opt.						
WARMING	Warming Blower		Opt. (DE, WD)		Opt.					
FOCAL SPECIFICATIONS FOR LENSES without BE for XQS Head	M. Area	WD	FL	BD [µm]	PD [kW/cm²]	BD [µm]	PD [kW/cm²]	BD [µm]	PD [kW/cm²]	
	40x40	60 mm	65 mm	301	14,1	421	21,5	421	28,7	
	60x60	95 mm	95 mm	441	6,6	617	10,0	617	13,4	
	75x75	115 mm	125 mm	583	3,8	816	5,7	816	7,7	
	100x100	165 mm	160 mm	743	2,3	1040	3,5	1040	4,7	
	100x100	165 mm	160 mm	743	2,3	1040	3,5	1040	4,7	
FOCAL SPECIFICATIONS FOR LENSES with BE for XQS Head	M. Area	WD	FL	BD	PD	BD	PD	BD	PD	
	40x40	60 mm	65 mm	150	56,3	168	135	168	180	
	60x60	95 mm	95 mm	220	26,2	247	62,8	247	83,7	
	75x75	115 mm	125 mm	291	15,0	326	35,9	326	47,9	
	100x100	165 mm	160 mm	372	9,2	416	22,1	416	29,4	
	150x150	235 mm	240 mm	555	4,1	622	9,9	622	13,2	
	200x200	320 mm	320 mm	743	2,3	833	5,5	833	7,3	
	250x250	430 mm	410 mm	950	1,4	1064	3,4	1064	4,5	
500x500	700 mm	720 mm	1670	0,5	1871	1,1	1871	1,5		
FOCAL SPECIFICATIONS FOR LENSES with BE for HPD Head	M. Area	WD	FL	BD	PD	BD	PD	BD	PD	
	40x40	55 mm	65 mm	-	-	105	344	105	458	
	60x60	85 mm	95 mm	-	-	154	161	154	215	
	100x100	150 mm	150 mm	-	-	242	65,4	242	87,2	
	150x150	230 mm	230 mm	-	-	373	27,4	373	36,5	
	200x200	310 mm	300 mm	-	-	486	16,1	486	21,5	
	250x250	400 mm	400 mm	-	-	651	9,0	651	12,0	
	320x320	435 mm	450 mm	-	-	729	7,2	729	9,6	
500x500	700 mm	715 mm	-	-	1160	2,8	1160	3,8		
MARKING HEAD	XQS Internal	Std.								
	XQS Split	-	Opt. (SE, DE)							
	HPD Split	-	Opt. (SE, DE)							
	XQS Split WD (IP65)	Opt. (WD)	Opt.		Opt.					
	HPD Split WD (IP65)	Opt.		Opt.						
ACCESSORIES MARKING HEAD	Beam Exit at 0°	Opt.								
	Beam Exit at 90°	Std.								
	Split Elbow	-	Opt.		Opt.					
	Focal Distance Indicator	Opt.								
	Marking Area Indicator	Opt.								
CONTROL	Touch Screen TSL-V3	Opt. (SE, DE)								
	Touch Screen TSL-V3 IP65	Opt. (WD)			Opt.					
	PC with Marca Software	Opt.								
SOFTWARE	ScanLinux	Opt.								
	MarcaTouch OS 2.00	Std.								
	Marca Full Graphics PC Softw.	Std.								
	TCPIP Protocol	Opt.								
	Profinet Protocol	Opt.								
	OPC-UA Protocol	Opt.								
	Internal Barcode Generator	Opt.								
SAFETY	ElectroMechanical Shutter	Opt.								
	Performance Level d Safety Kit	Opt.								
ACCESSORIES	Diode Marking Pointer - Encoder Kit - Mounting Support - Photocell Kit									
ENVIRONMENTAL CONDITIONS	Operating Temperature	5 °C (50 °F) to 40 °C (104 °F)								
	Humidity	< 95 % non-condensing								
	Vibrations	No vibrations								
	Protection Rate (3 types available)	SE (Standard Environment)								-
		DE (Dusty Environment)								-
DIMENSIONS (AxBxC)	SE&DE (Standard & Dusty Environment)		146 x 196 x 732 mm		176 x 216 x 750 mm					
	WD (Wash-Down Environment)		168 x 220 x 710 mm		189 x 241 x 740 mm					
	Net Weight	17 kg		25 kg						
WEIGHT	Gross Weight	20 kg		28 kg						

# SPA2 C ideal for packaged goods

SMART | RELIABLE | VERSATILE

SPA2 C 10W, 30W and 40W CO2 lasers are widely used in packaged goods applications including labels, boxes, bottles and blister packs. They are typically used to code paper and board, glass and ceramics, coated materials, PET and PVC.

- 10.6, 10.2 and 9.3 wavelength lasers are available to meet the coding needs of specific substrates such as film and PET.
- DUO dual processor technology enables high-speed and high-quality printing with variable data.
- Minimises power consumption choosing the most appropriate flow rate.
- 10.1-inch touch screen controller with context sensitive HELP and on-line instruction videos including Marca Touch OS.
- Extra protection enclosures are available for dusty (IP54) and washdown (IP65) environments.



The most complete range of CO2, Fiber and DPSS lasers on the market

## CO2

Available from 10 to 450W

## PRECISION

Several features including Macsa's proprietary VCS to ensure high print quality even on high-speed production lines.



## ADAPTABILITY

Wide range of essential and extra accessories to optimise the laser's performance.



## Fiber

From 20W to 200W

## VERSATILITY

Integrated into any production line, it can encode over a wide range of materials using 3D printing options.



## SIMPLICITY

Videos and support material to facilitate its installation and integration.



## Fiber Film

From 20W to 100W

## RELIABILITY

Production environments can test the reliability of laser systems. SPA2 lasers are designed to operate reliably in dusty or damp environments even when subject to extreme temperatures.



## CONNECTIVITY

The lasers include the TCP/IP protocol in order to have complete control of the system from most standard communications. The new SPA2 platform includes the integration of the most widely used industrial communication protocols such as Profinet and OPC-UA. These are both available in all models upon request.



SE Standard Environment IP31  
C-10W / C-30W



DE Dusty Environment IP54  
C-10W / C-30W



WD Washdown IP65  
C-10W / C-30W / C-40W



## Why Macsa id?


Macsa id is one of the 4 leading companies in the world in coding and marking lasers. It offers the widest range of lasers to code and mark both in the productive sectors (food, beverages, pharmaceutical, healthcare, cosmetics ...) as well as in the industrial ones (industry, automotive, aeronautics, defense, construction materials ...).

Macsa id is recognized as a world leader in technological innovation in lasers for marking and coding. The company invests more than 10% of its turnover in R&D every year.



Macsa id in more than 80 countries

- MACSA Headquarters
- MACSA Branch Offices
- MACSA Distributors
- MACSA JV

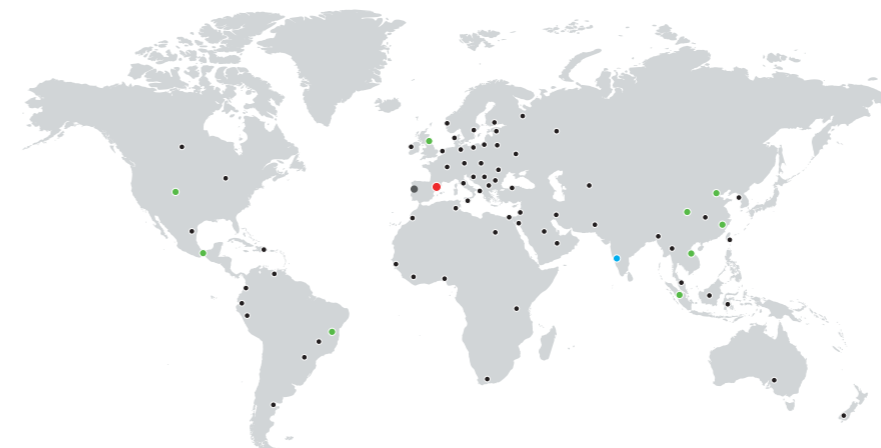

## SOFTWARE AND SERVICES



Maintaining Service

Equipment performance

## MONITORING AND PREDICTIVE MAINTENANCE

From any place and at any time, data is provided in real time to increase productivity, improve efficiency and reduce downtime. It allows monitoring of the status of the equipment from any remote device which can allow the reception of alerts. IntegraNET allows our service engineers to receive Diagnostics in real time to detect problems before they occur and prevent expensive downtimes.

## REMOTE ASSISTANCE

IntegraNET allows field technicians and Macsa id engineers to interconnect and exchange information through video calls.

## INCREASED EFFICIENCY

The collected data is integrated with the different software of Macsa id modules for production management, traceability and efficiency of the production lines.



## NO CONSUMABLES

A clean technology that does not produce waste.

## ENVIRONMENT FRIENDLY

No harmful emissions are generated, thus benefitting the work environment and the planet.

## CLEAN

For a cleaner and healthier workspace.

## ENERGY EFFICIENT

Maximum quality and coding speed with just the right amount of energy.